

Fig. 1




Fig. 2

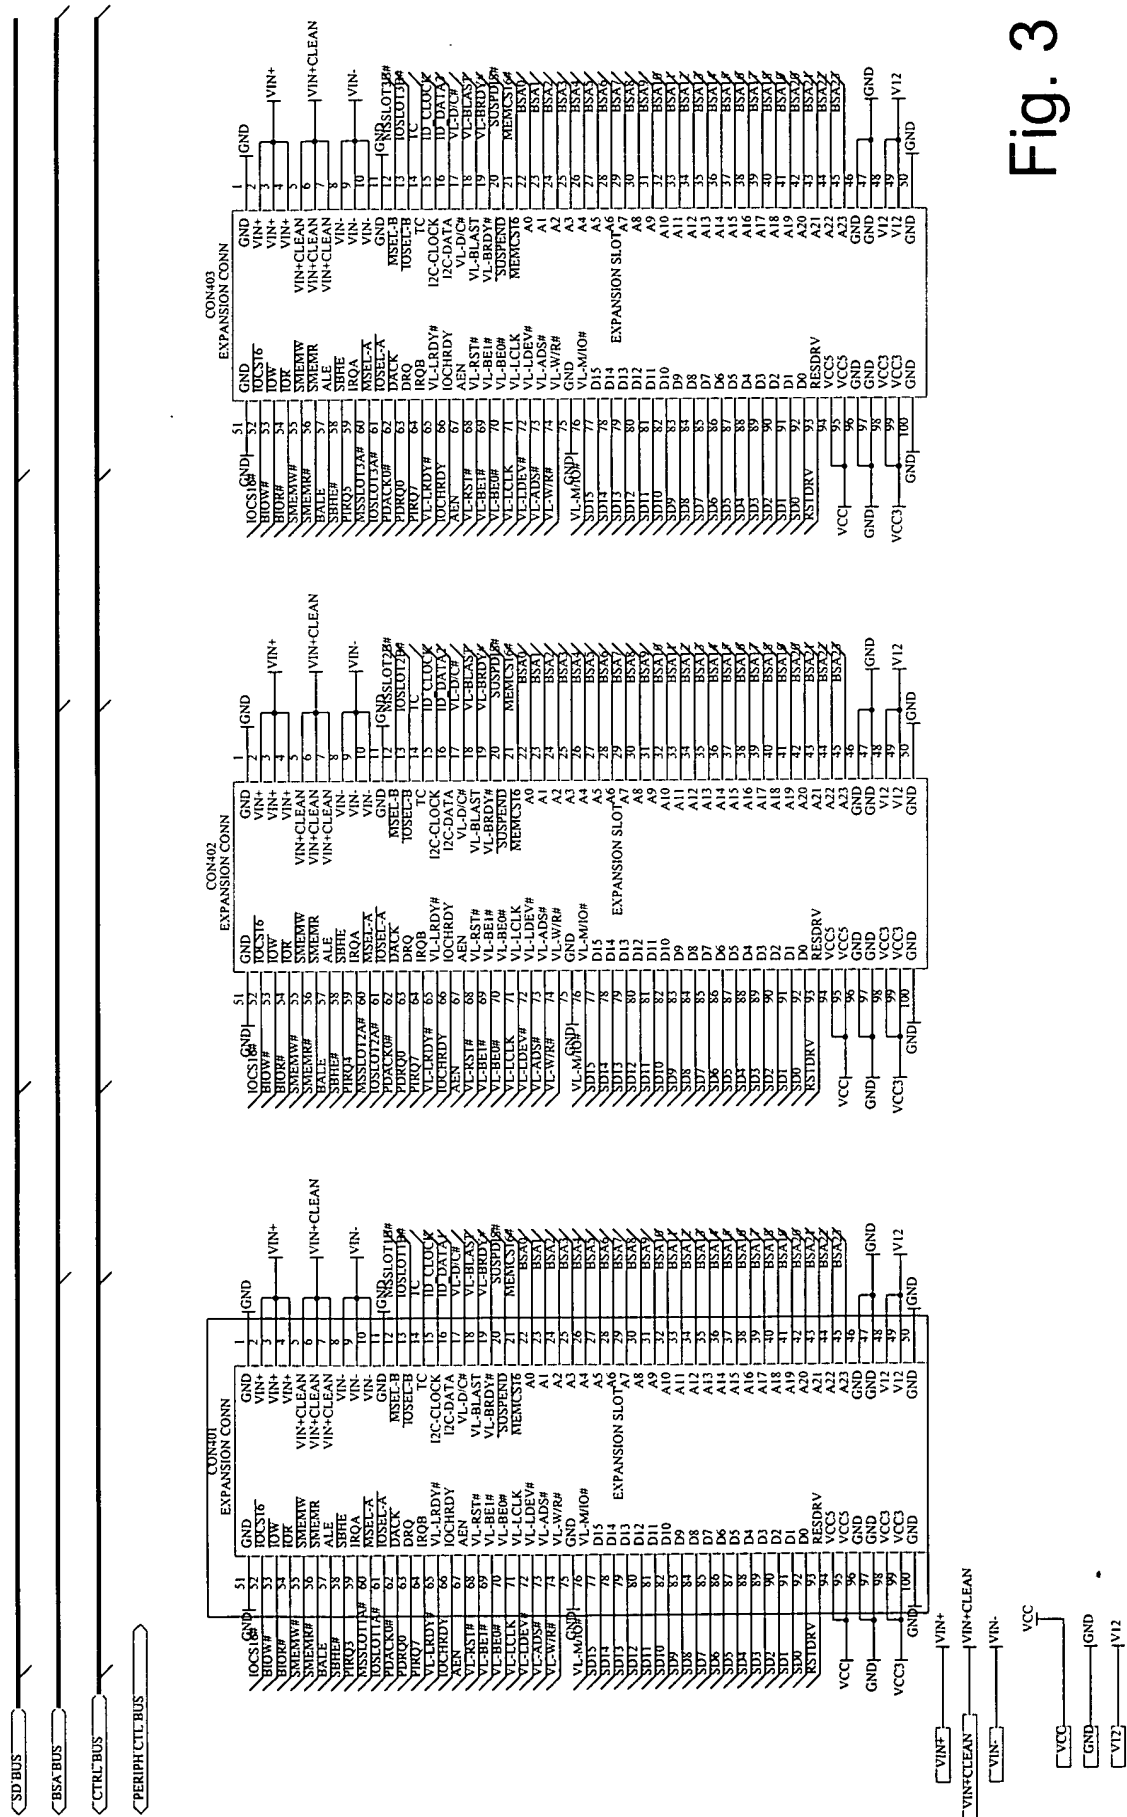


Fig. 3

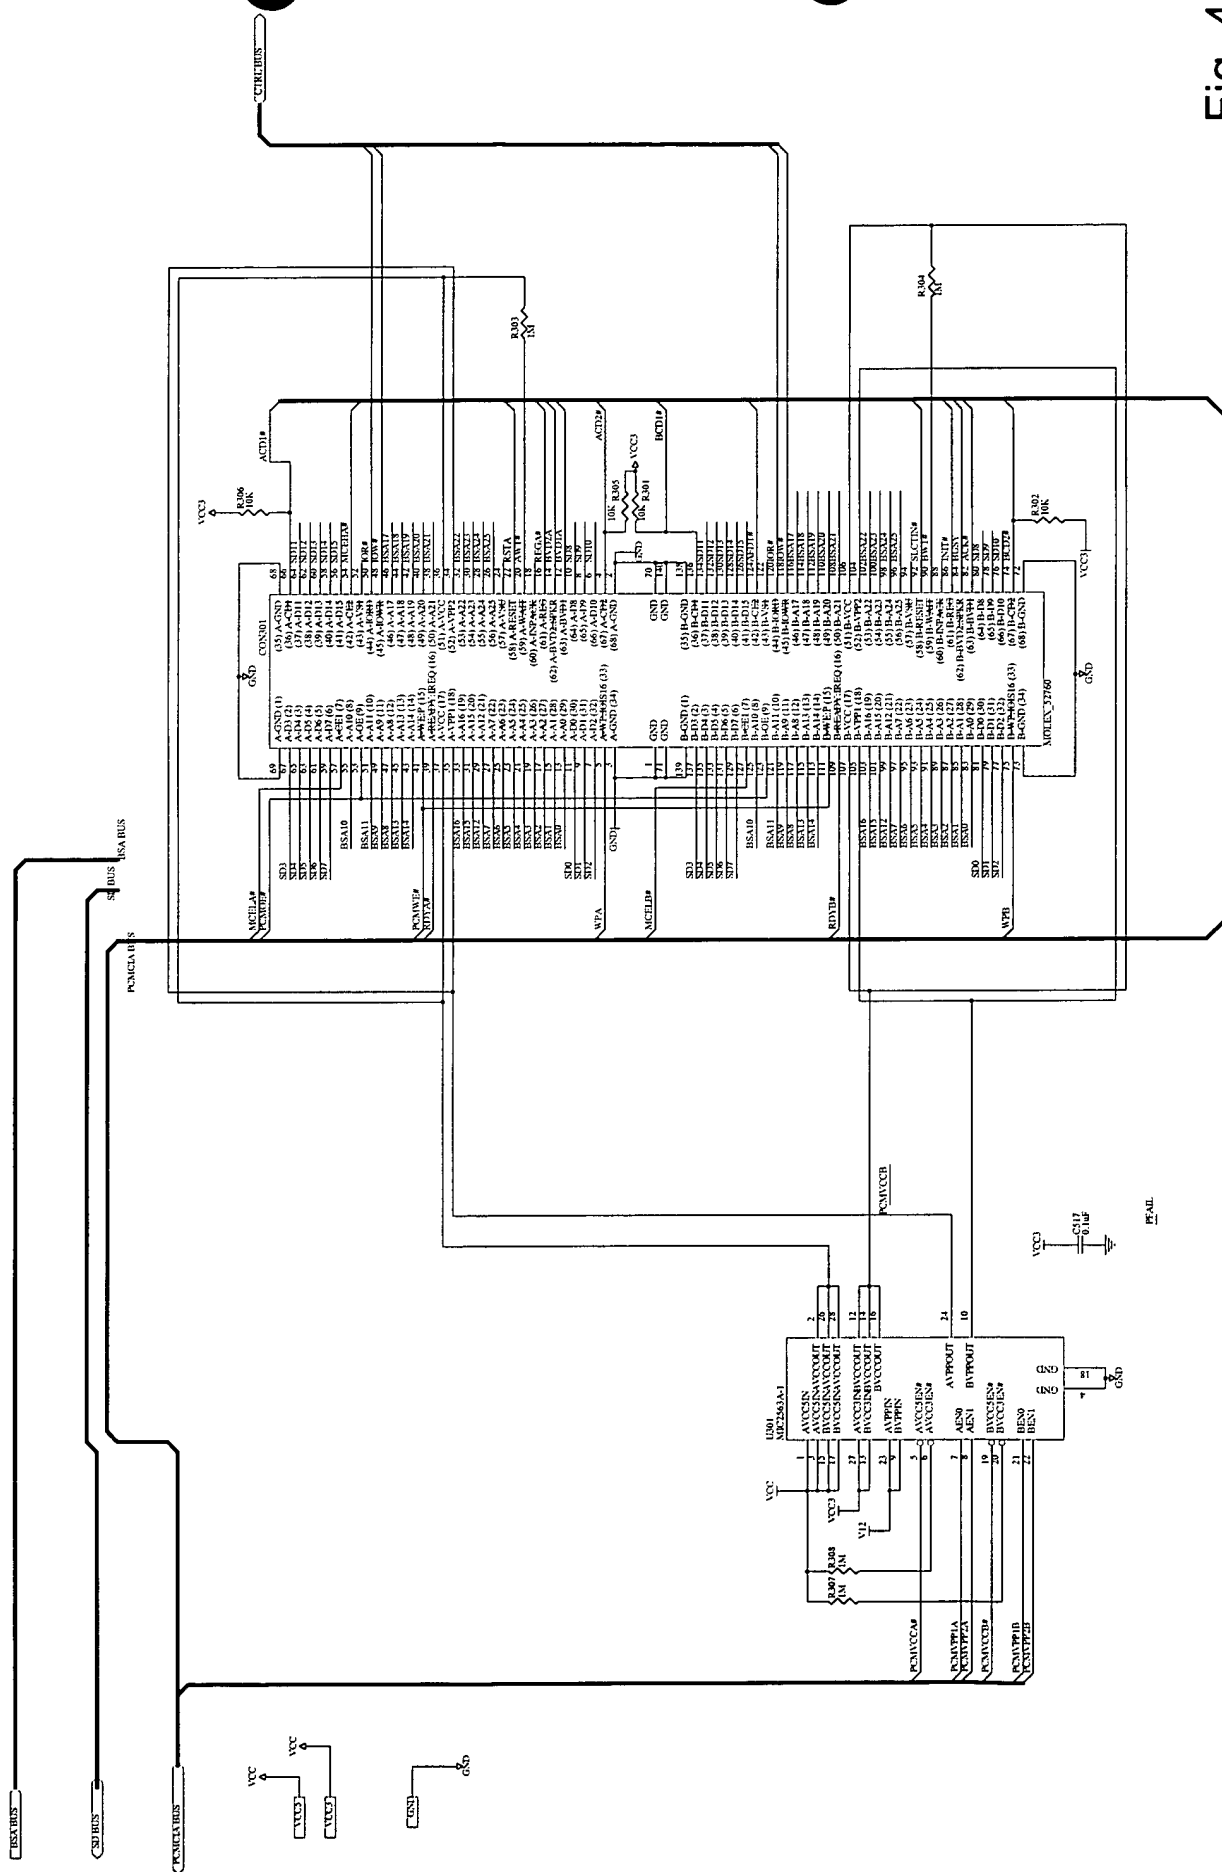
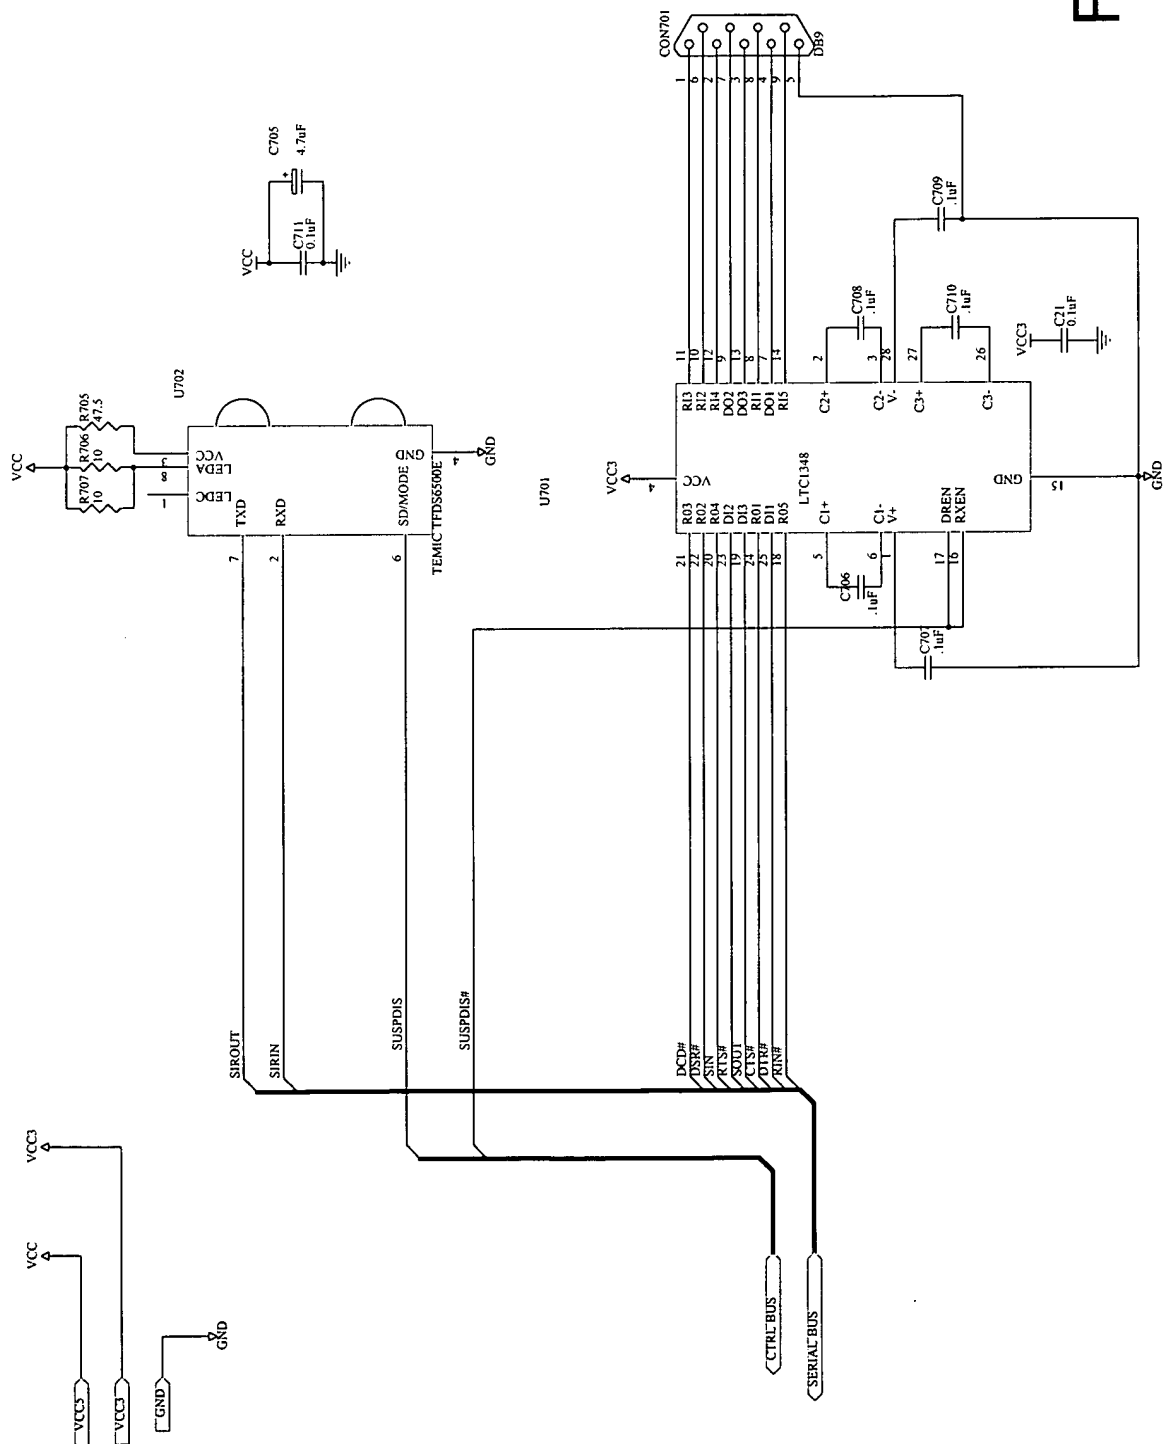


Fig. 4



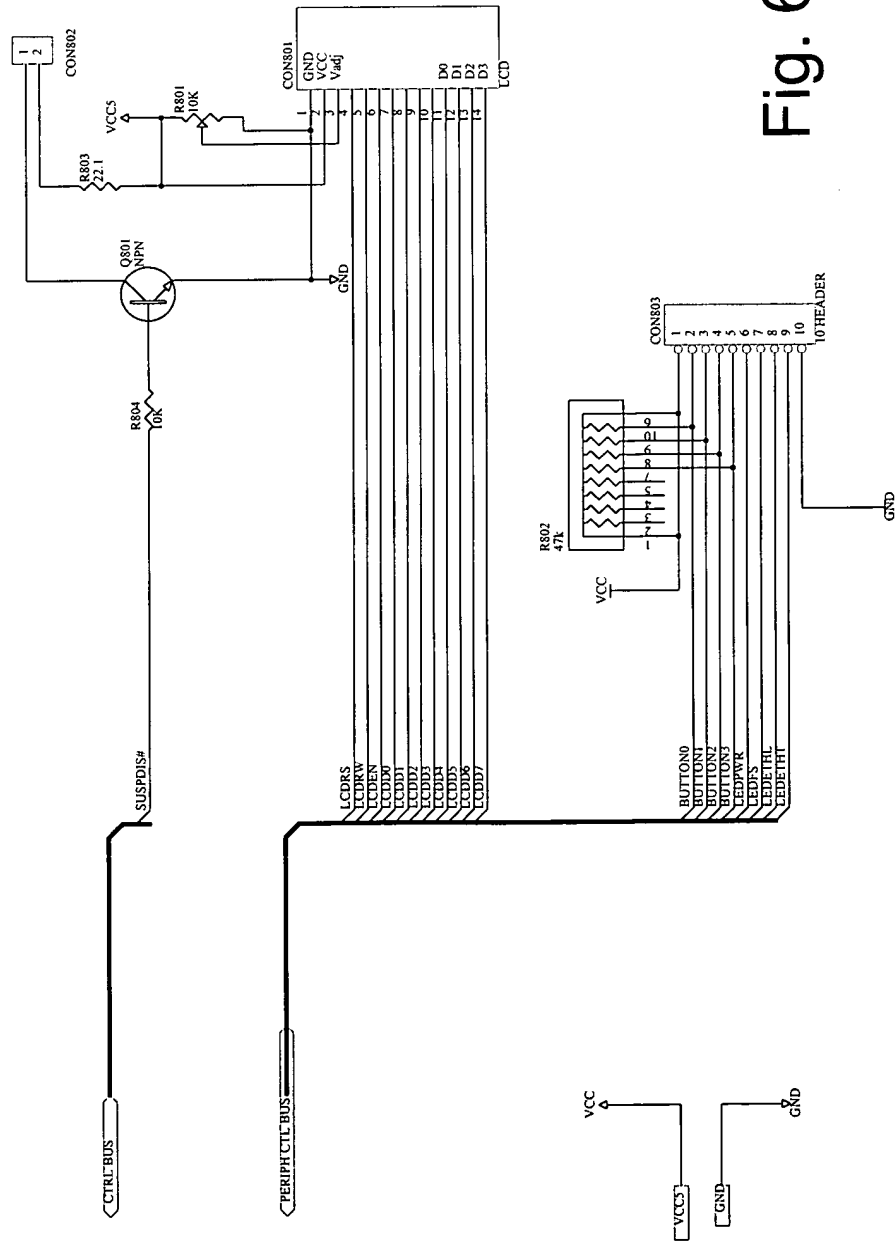


Fig. 6

Fig. 7

Fig. 8

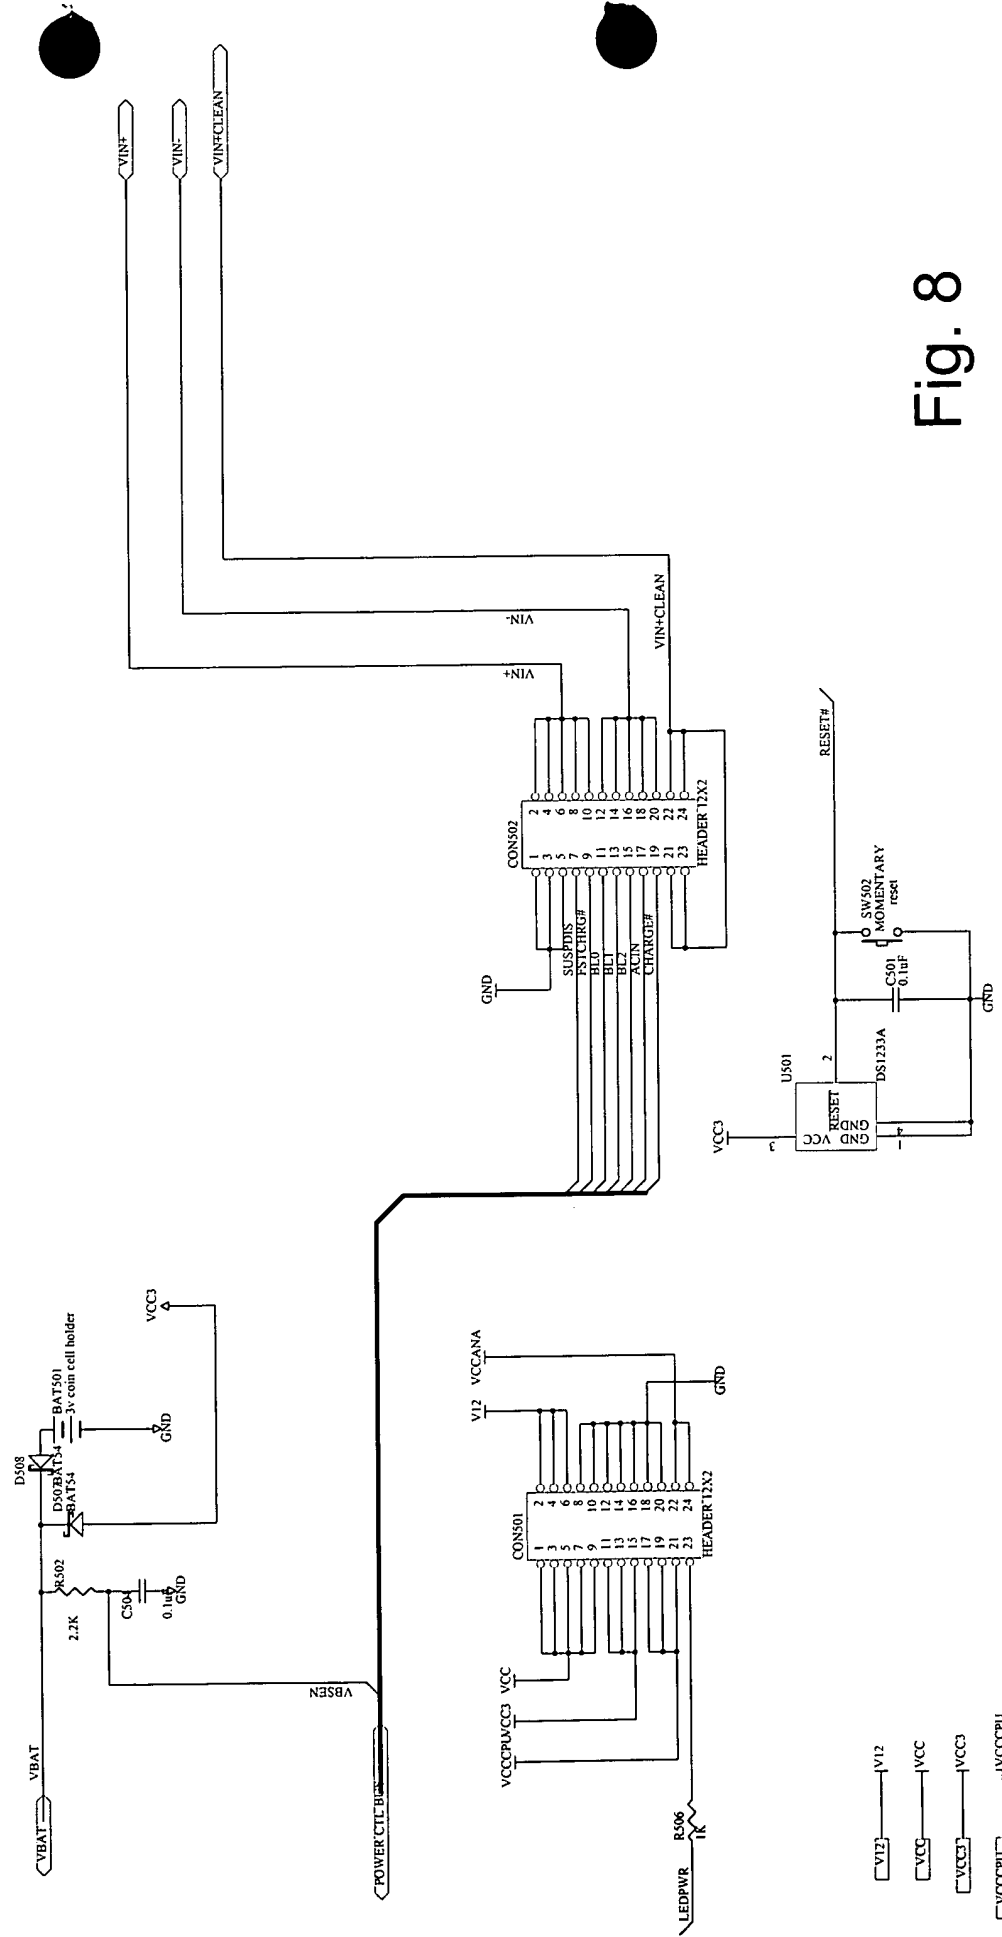


Fig. 8



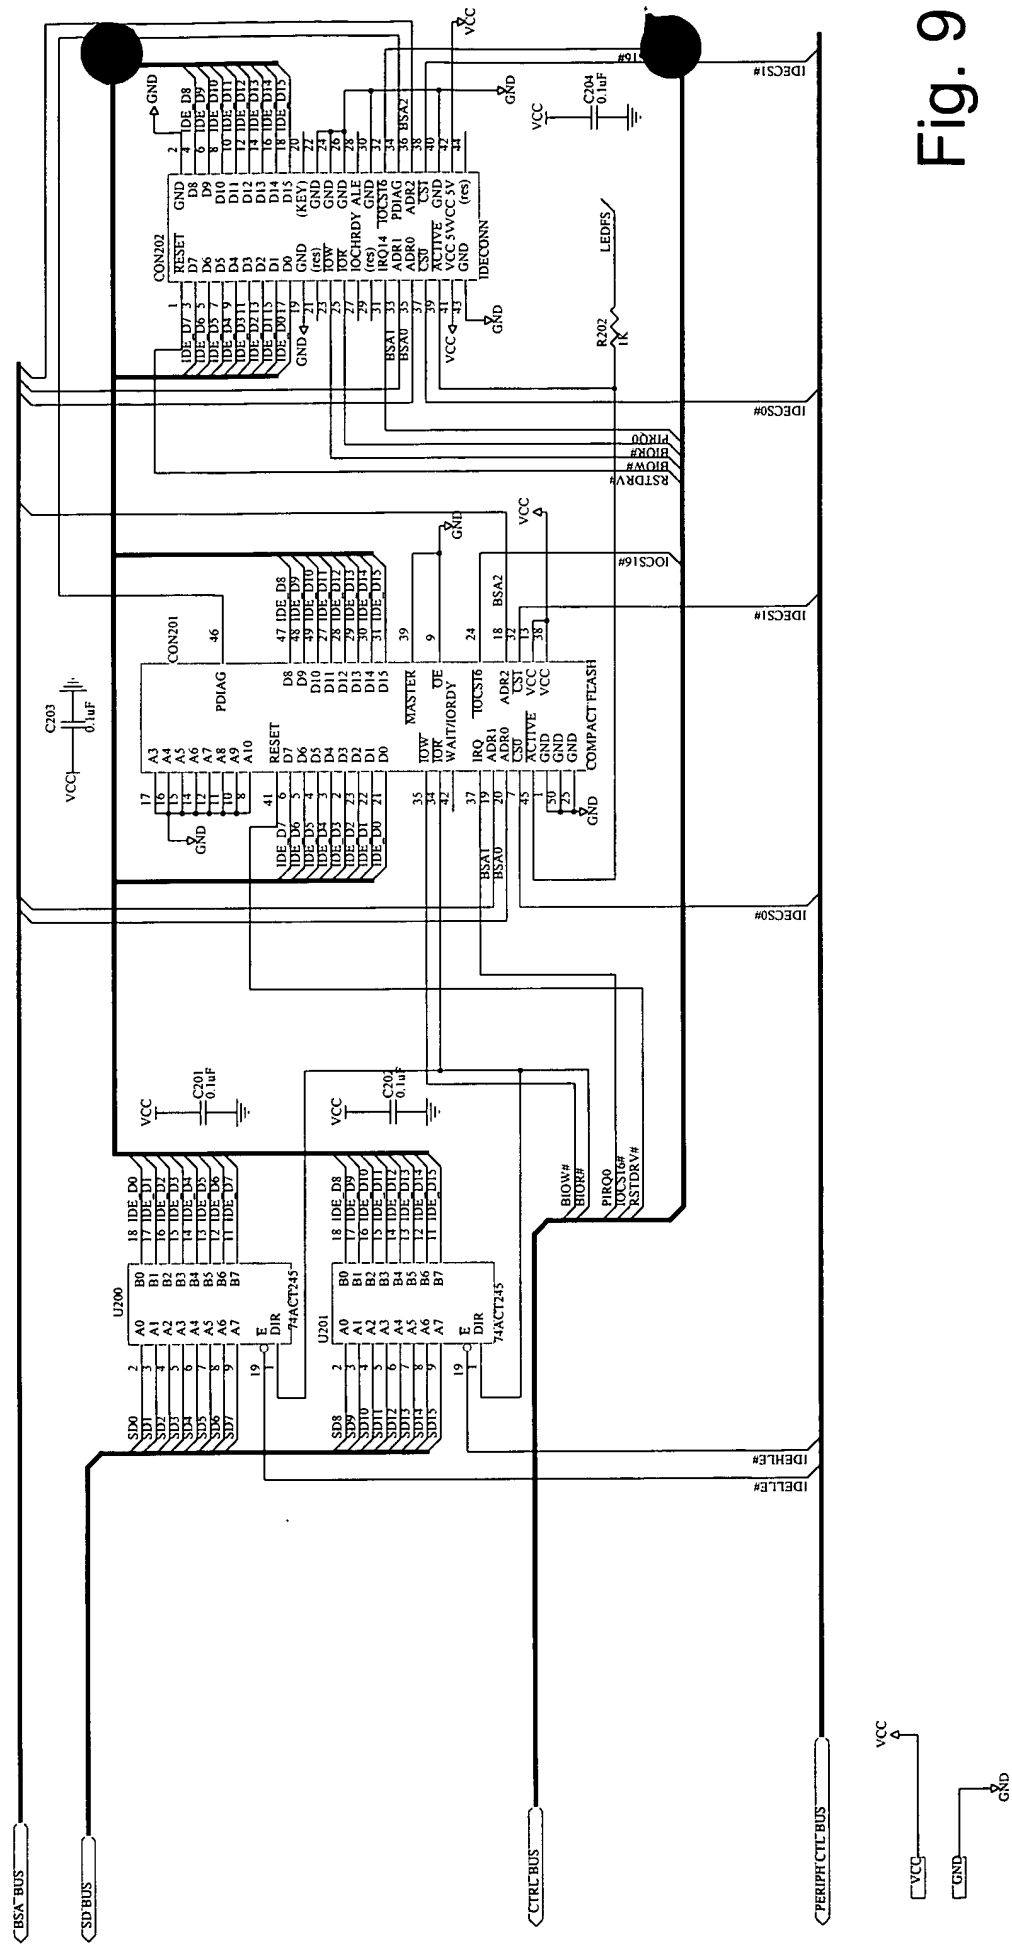


Figure 10 shows the pin connections for the ISPLSI096C-70LT(128) device. The diagram illustrates the connections for the BSA BUS, CTRL BUS, and PCMCIA BUS. The device is shown with its pin numbers (1 to 128) and the corresponding signals. The connections are as follows:

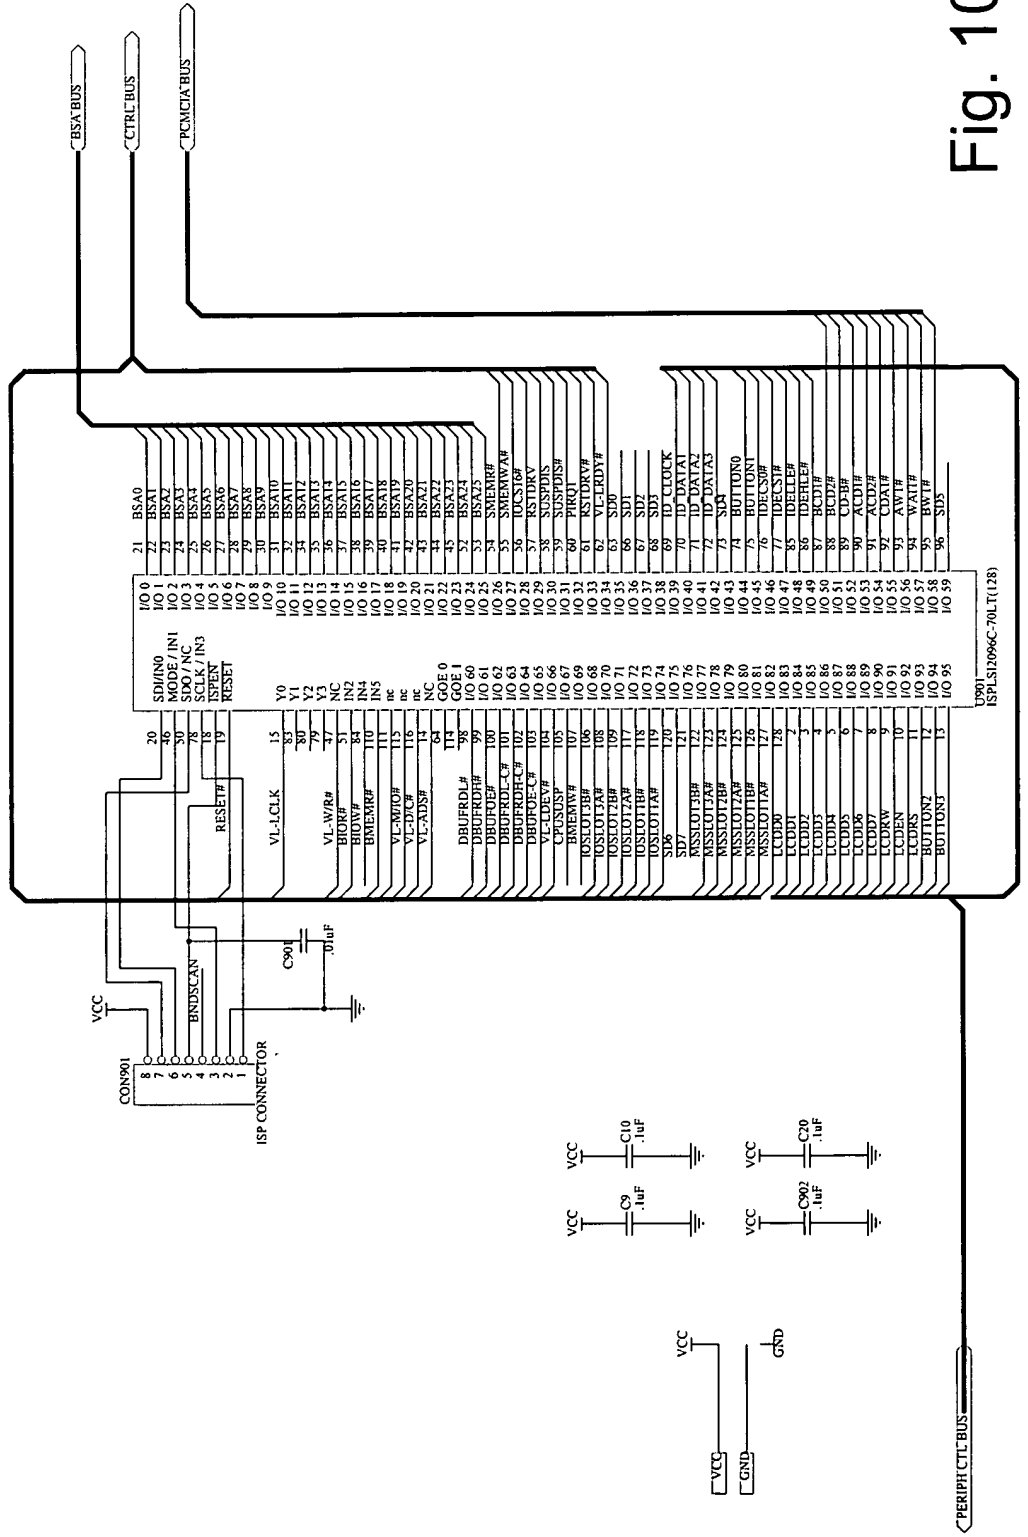


Fig. 10

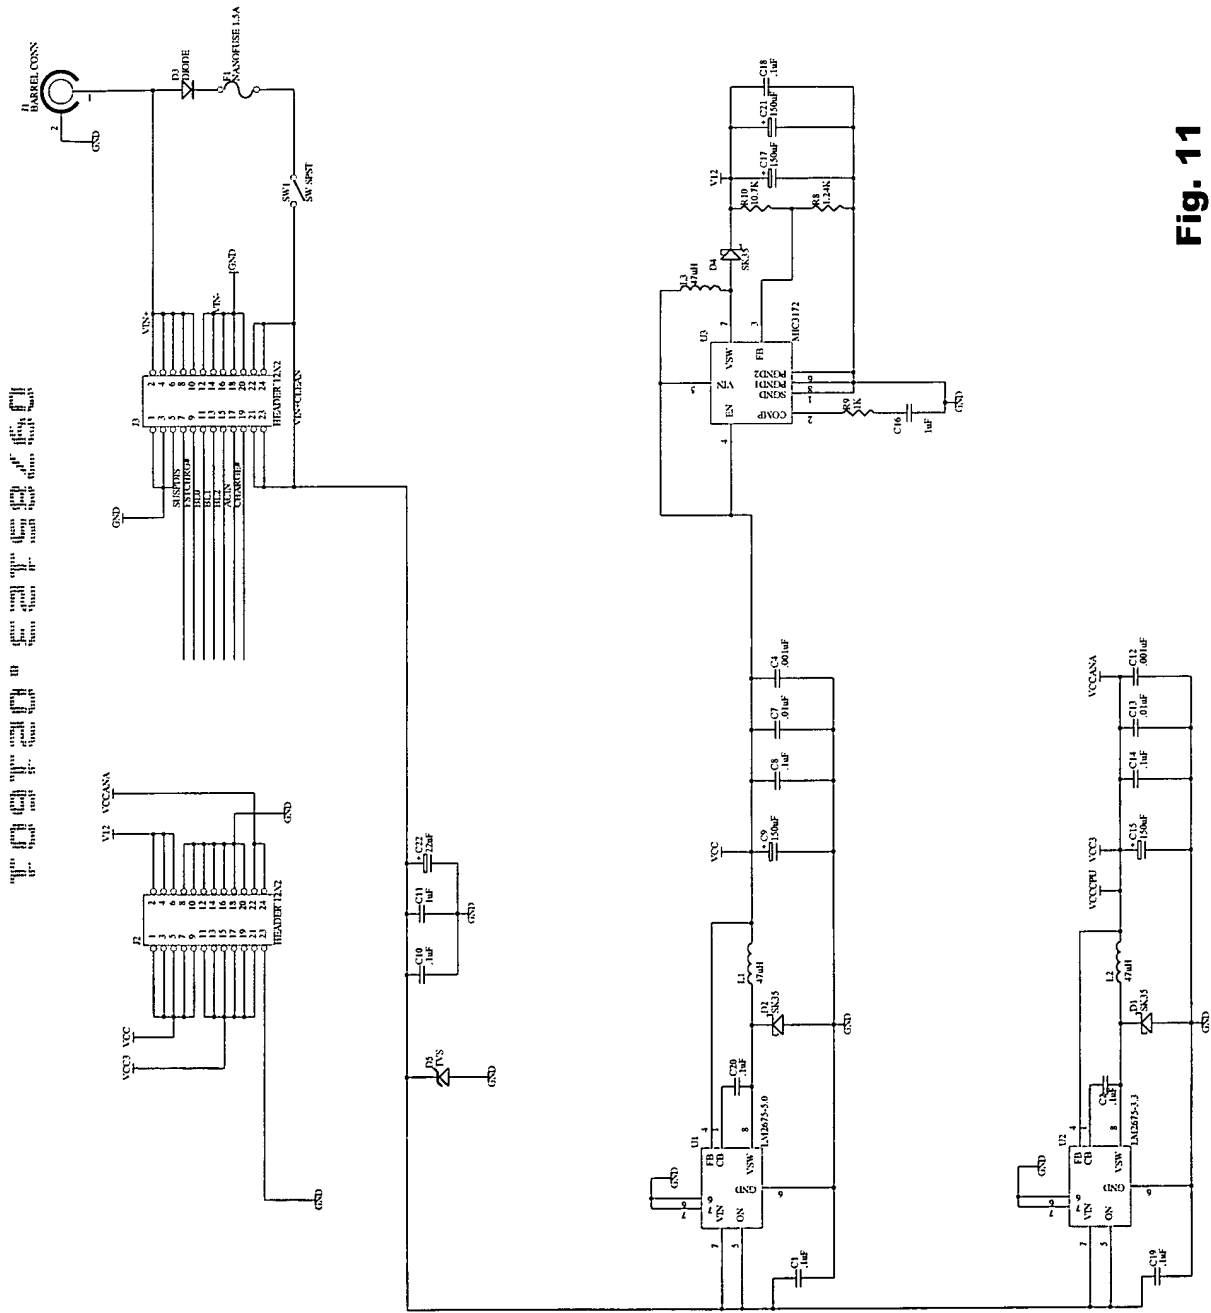


Fig. 11